
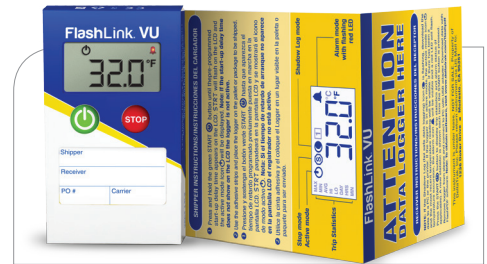


Product Specifications

FlashLink VU In-Transit Logger

Measurement Range	-40°F to 150°F (-40°C to 65°C)
Temperature Resolution	0.1°F/°C
Accuracy	±1.0°F from 14°F to 77°F (±0.5°C from -10°C to 25°C); ±2.0°F above 77°F (±1.0°C above 25°C) ±2.0°F below 14°F (±1.0°C below -10°C)
Data Capacity	3824 points
Data Download Time	5 seconds typical for 3800 points
Factory Programmable Alarm Levels	High & Low levels over entire range, displayed on LCD
Battery	3V Lithium/18 months
Dimensions	1.962" x 3.423" x .575" (50mm x 87mm x 15mm)
Casing	ABS plastic
Weight	1.6 oz. (45.36 grams)
Shock Resistance	Withstands 3-foot (1 meter) drop to hard surface
Certification	CE Mark, NIST traceable, ROHS Compliant
Display	LCD, Red LED Alarm
IP Rating	IP56
Storage conditions	-4°F to 122°F (-20°C to 50°C) 0% to 95% RH w/o condensation
System Requirements	Windows PC with current operating system, Adobe Reader, FlashPDF software
Download Requirements	8-Pin to USB adapter

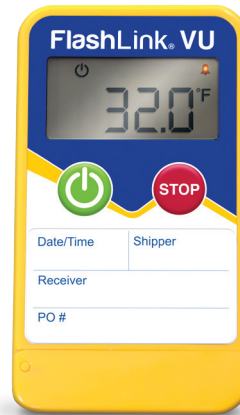

FlashLink VU with high visibility in-transit sleeve

Models	5-Day	15-Day	45-Day	75-Day
Logging Interval	1 min. 54 Sec	5 min. 40 Sec	16 min. 58 Sec	28 min. 16 Sec
°F Models	20741	20742	20743	20744
°C Models	20745	20746	20747	20748

- Large, easy to read LCD display
- Trip history statistics available on LCD
- Patented Shadow Log feature guarantees data even if the operator fails to start the unit, single-use
- Print data using Graphics Printer, FlashPDF software or download to PC
- NIST traceable and CE Mark
- IP56 water-resistant rating

Patent No. 6,088, 514

DeltaTrak manufactures products under an ISO 9000 registered quality management system

SS0075_16C2

