


Product Specifications

FlashLink[®] RTL Prime In-Transit Logger

Temperature Range	-4°F to 158°F (-20°C to 70°C)
Temperature Accuracy	±0.9°F from 14°F to 113°F (±0.5°C from -10°C to 45°C) ±2°F if <14°F and >113°F (± 1°C if < -10°C and > 45°C)
Temperature Resolution	0.1 °F/°C
Data Capacity	28,800 data points
Logging Interval	Factory programmed
GSM Network	2G Quad band GSM 850/900/1800/1900 MHz, GPRS data
SIM	Internal Embedded (Global Data Roaming)
Power Source	Lithium-ion battery, meets UN38.3
Battery Shelf Life	1 year
Weight	1.83 oz (52 grams)
Logger Dimensions	2.13 in x 3.89 in x 0.37 in 54 mm x 85 mm x 9.4 mm
Certification	RTCA/DO-160, FCC, CE Mark, RoHS, WEEE, NIST traceable temperature accuracy
System Requirements	Logger requires cellular network connection to send data to secure cloud application. User requires PC or other Internet enabled device to view data online.
Download Requirements	Direct USB connector to download trip report to PC or other USB enabled device that can read PDF files
Waterproof Rating	IP65

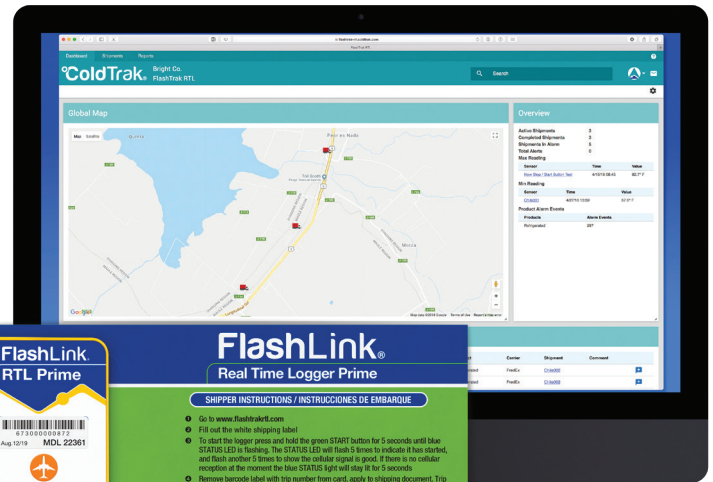

Model	Trip Duration	Logging Interval	Data Upload Interval
22361	60-Day	10 Minutes	60 Minutes

- Monitors location and temperature
- Data transmitted via GSM cellular networks
- No need to open vehicle doors to access information
- 24/7 cloud service to view and analyze data remotely
- 2-in-1 backup onboard PDF logger feature
- Make immediate cold chain management decisions
- Reroute trucks when necessary
- Customize settings for high/low alarm limits
- 12 month battery shelf life
- Data stored in the cloud for traceability, audits, HACCP, and FSMA compliance

DeltaTrak manufactures products under an ISO 9001:2015 registered quality management system

SS 22361_20D2

